



§ **SPECIFICATION APPROVAL SHEET** §

Fdt Tech Module No	LT056N5xA0-FDR
Description:	5.6" Digital TFT-LCD Module
SPEC No.:	SAS-1103003
Version:	0.0
Issue Date:	March 4, 2011

※ This approval sheet contains 17 pages including the cover and appendix.

Customer:	APPROVED BY:
Date: / / 11	

APPROVED BY:


CHECKED BY:

DESIGNED BY:



FLAT DISPLAY TECHNOLOGY

5.6" Digital TFT-LCD Module

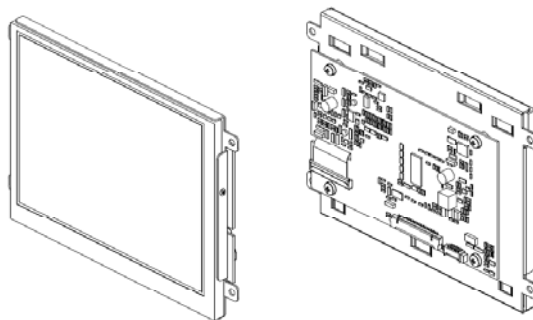

■ LT056N5xA0-FDR

1. General Descriptions

1.1 Features

- 18bits LVDS interface
- Image Reversion: Up/Down and Left/Right
- LED Backlight Circuit Operation Voltage: +5V
- Support Touch Screen Function (Option)

1.2 Applications

- Portable product
- Industrial
- Hand-held
- Security
- Instrument Display
- Office Electronics

1.3 Application Precautions

Do not use the products herein for the following equipment which demands extremely high performance in terms of functionality, reliability, or accuracy.

- Aerospace equipment
- Communication equipment for trunk lines.
- Control equipment for the nuclear power industry.
- Medical equipment related to life support, etc.

The other application that demands high reliability and functionality should first contact a sales representative.

FLAT DISPLAY TECHNOLOGY

■ LT056N5xA0-FDR V0.0



2. Contents


Contents	Page
1. General Description	1
1.1 Features	1
1.2 Applications	1
1.3 Application Precautions	1
2. Contents	2
3. Block Diagram	3
3.1 Block Diagram	3
4. TFT-LCD Information	4
4.1 TFT-LCD Mechanical Specifications	4
4.2 TFT-LCD Optical Characteristics	4
5. Order Information	5
5.1 Unit	5
6. Dimension Information	6-8
6.1 Unit (LT056N50A0-FDR)	6
6.2 Unit (LT056N51A0-FDR)	7
6.3 Unit (LT056N52A0-FDR)	8
7. Pin Description	9-11
7.1 J204 : LVDS I/O Terminals (Pitch 1.25mm 20Pin, Side Entry Type)	9-10
7.2 J203: Pin Assignment of Inverter (Pitch 1.25mm 6Pin, Side Entry Type)	10-11
7.3 J301C : Pin Assignment of Touch USB (USBA-Female 2.0mm, Side Entry Type)(Option)	11
7.4 J301D : Pin Assignment of Touch RS232 (D-SUB 9 MALE)(Option)	11
8. Absolute Maximum Ratings	12
8.1 Absolute Maximum Ratings	12
9. Recommended Operating Conditions	12
9.1 Electrical Characteristics	12
10. Interface Timing	13
10.1 Timing Parameters	13
11. 4W Resistance Touch Panel Characteristics	14-15
11.1 Touch Screen Integration Design Guide	14
11.2 Electrical Performance	14
11.3 Optical Performance	14
11.4 Mechanical Performance	15
11.5 Durability Performance	15
11.6 Environmental	15
11.7 Reliability Test Procedure	15
12. Operation Manual	16
12.1 Driver Board Manual	16

FLAT DISPLAY TECHNOLOGY

■ LT056N5xA0-FDR V0.0 

3. Block Diagram

3.1 Block Diagram

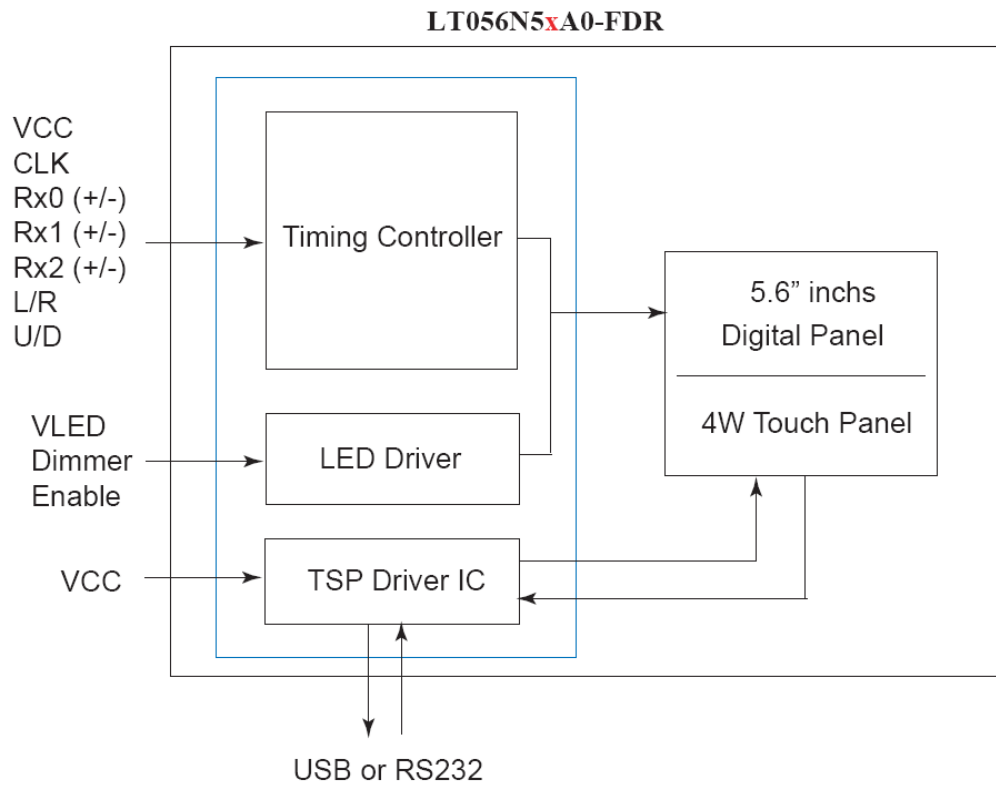

TECH

4. TFT-LCD Information

4.1 TFT-LCD Mechanical Specifications

Parameter	Specifications	Unit
Screen Size	5.6 (Diagonal)	inch
Display Format	640 x (R.G.B) x 480	dot
Active Area	112.896 (W) x 84.672 (H)	mm
Pixel Pitch	0.1764 (W) x 0.1764 (H)	mm
Surface Treatment	Anti-glare	
Weight	TBD	g

4.2 TFT-LCD Optical Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Remark
Viewing Angle	Horizontal	Left	60	70	---	deg	
		Right	60	70	---		
	Vertical	Top	40	50	---	deg	
		Bottom	60	70	---	deg	
Contrast Ratio	CR	At optimized Viewing angle	400	500	---	---	
Response time	Rise Fall	Tr	---	10	20	ms	
		Tf	---	15	30	ms	
Uniformity	U		70	75	---	%	
Brightness	L		300	350	---	cd/m ²	
White Chromaticity	x	$\theta = 0^\circ$	0.26	0.31	0.36		
	y	$\theta = 0^\circ$	0.28	0.33	0.38		
LED Life Time		25°C	20000	---	---	Hr	


FLAT DISPLAY TECHNOLOGY

■ LT056N5xA0-FDR V0.0



5. Order Information

5.1 Unit

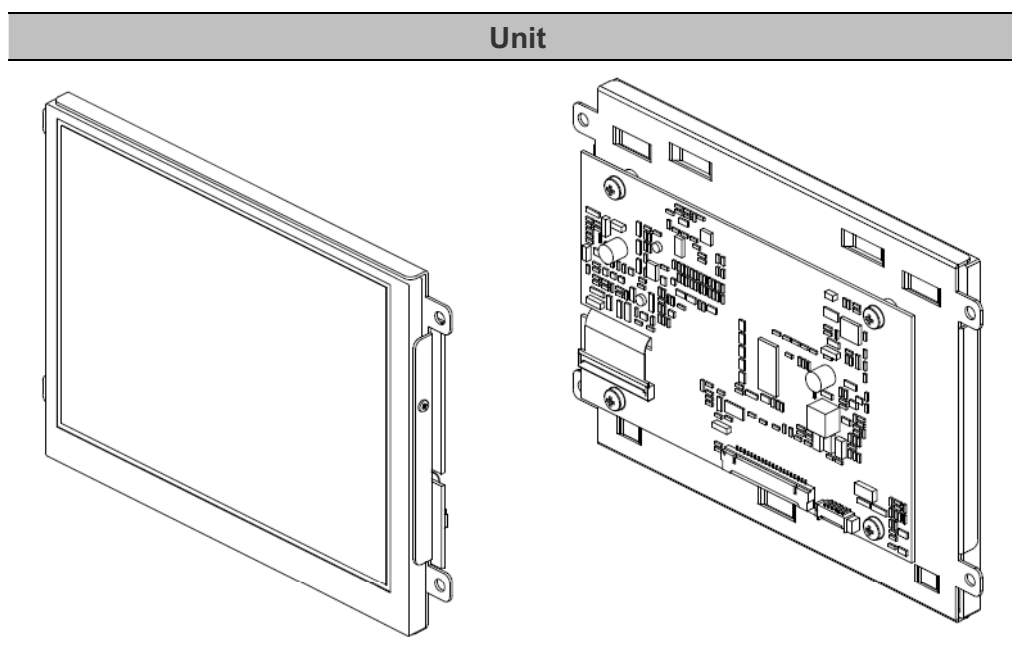

Parameter	LT056N50A0-FDR	LT056N51A0-FDR	LT056N52A0-FDR
Signal Input Connector	20 PIN	20 PIN	20 PIN
Touch Panel Type	-	4W Resistive	4W Resistive
Touch Screen Interface	-	USB	RS-232
Bracket	⊙	⊙	⊙

Note: 1. The tape in back of the bracket is to avoid the panel falling from the unit in delivery.

2. It's just a temporary adhesion.


FLAT DISPLAY TECHNOLOGY

■ LT056N5xA0-FDR V0.0



6. Dimension Information

6.1 Unit (LT056N50A0-FDR)

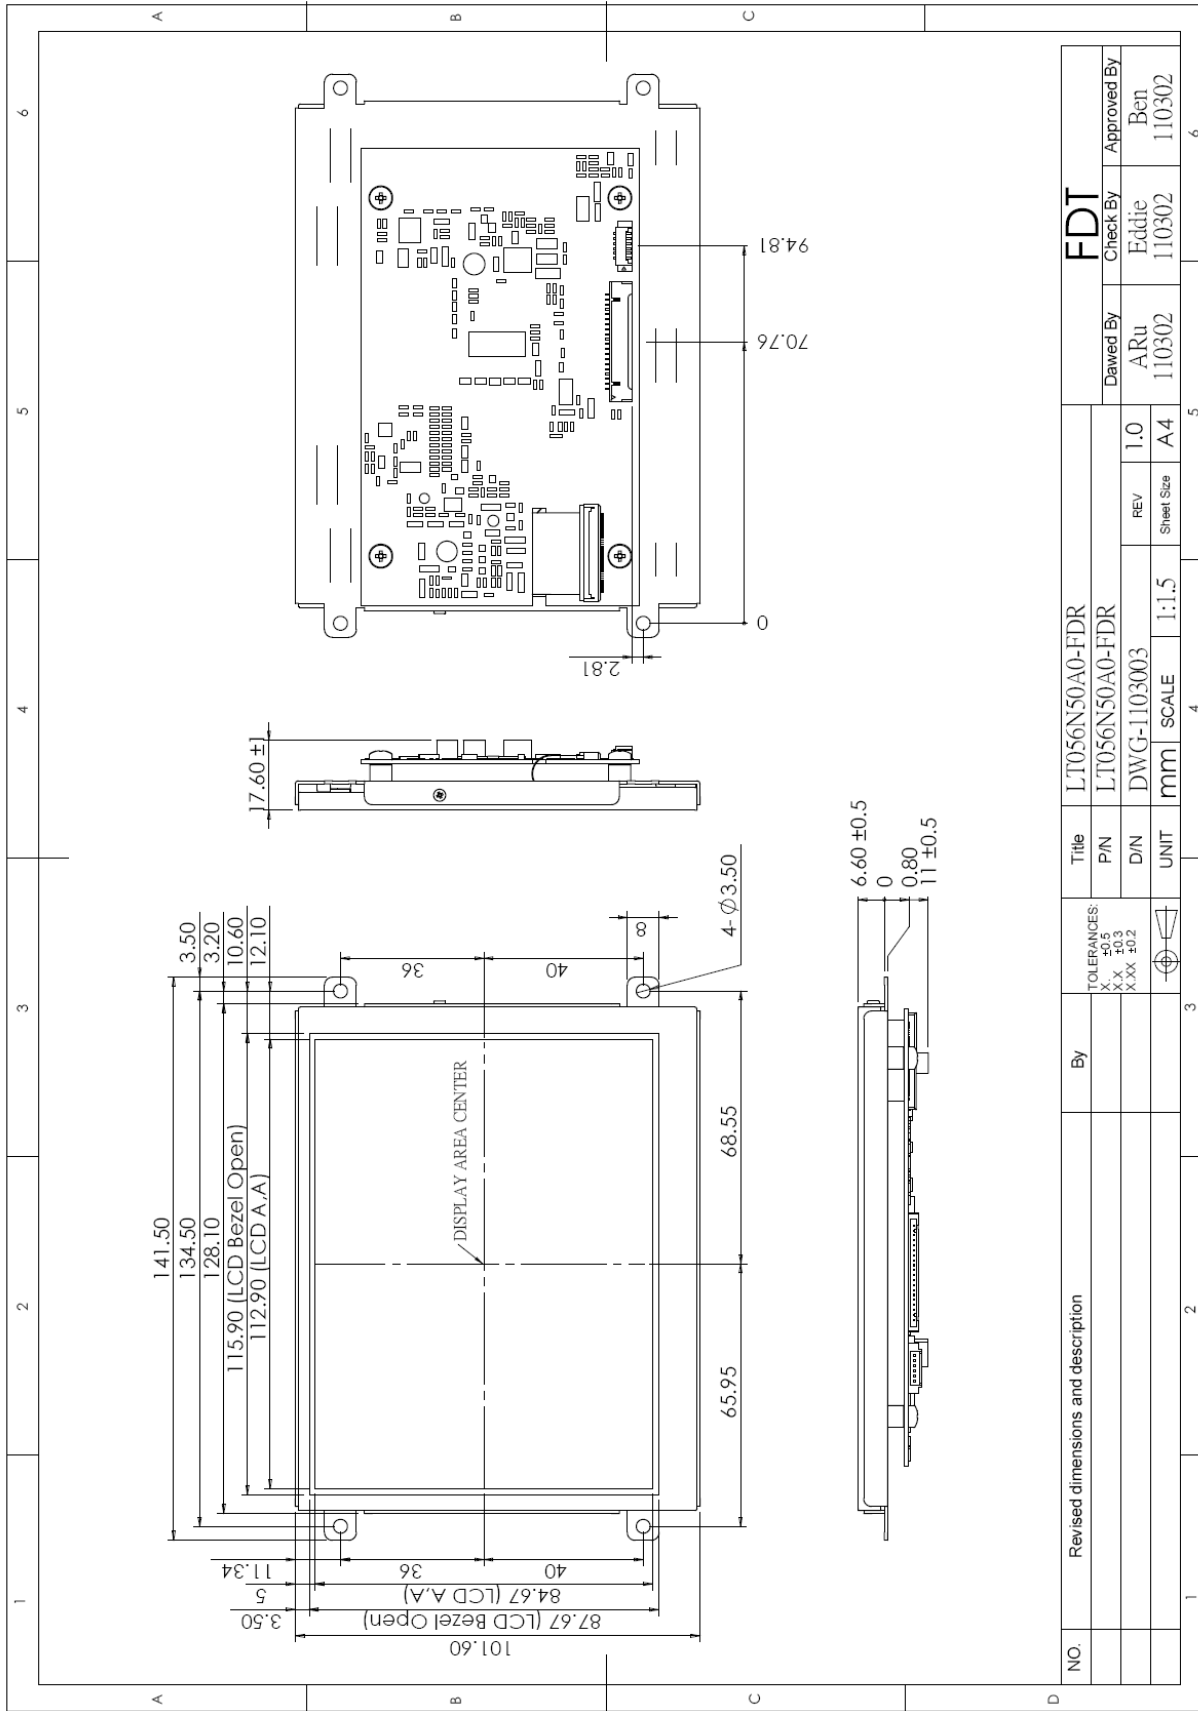


FLAT DISPLAY TECHNOLOGY

■ LT056N5xA0-FDR V0.0



6.2 Unit (LT056N51A0-FDR)

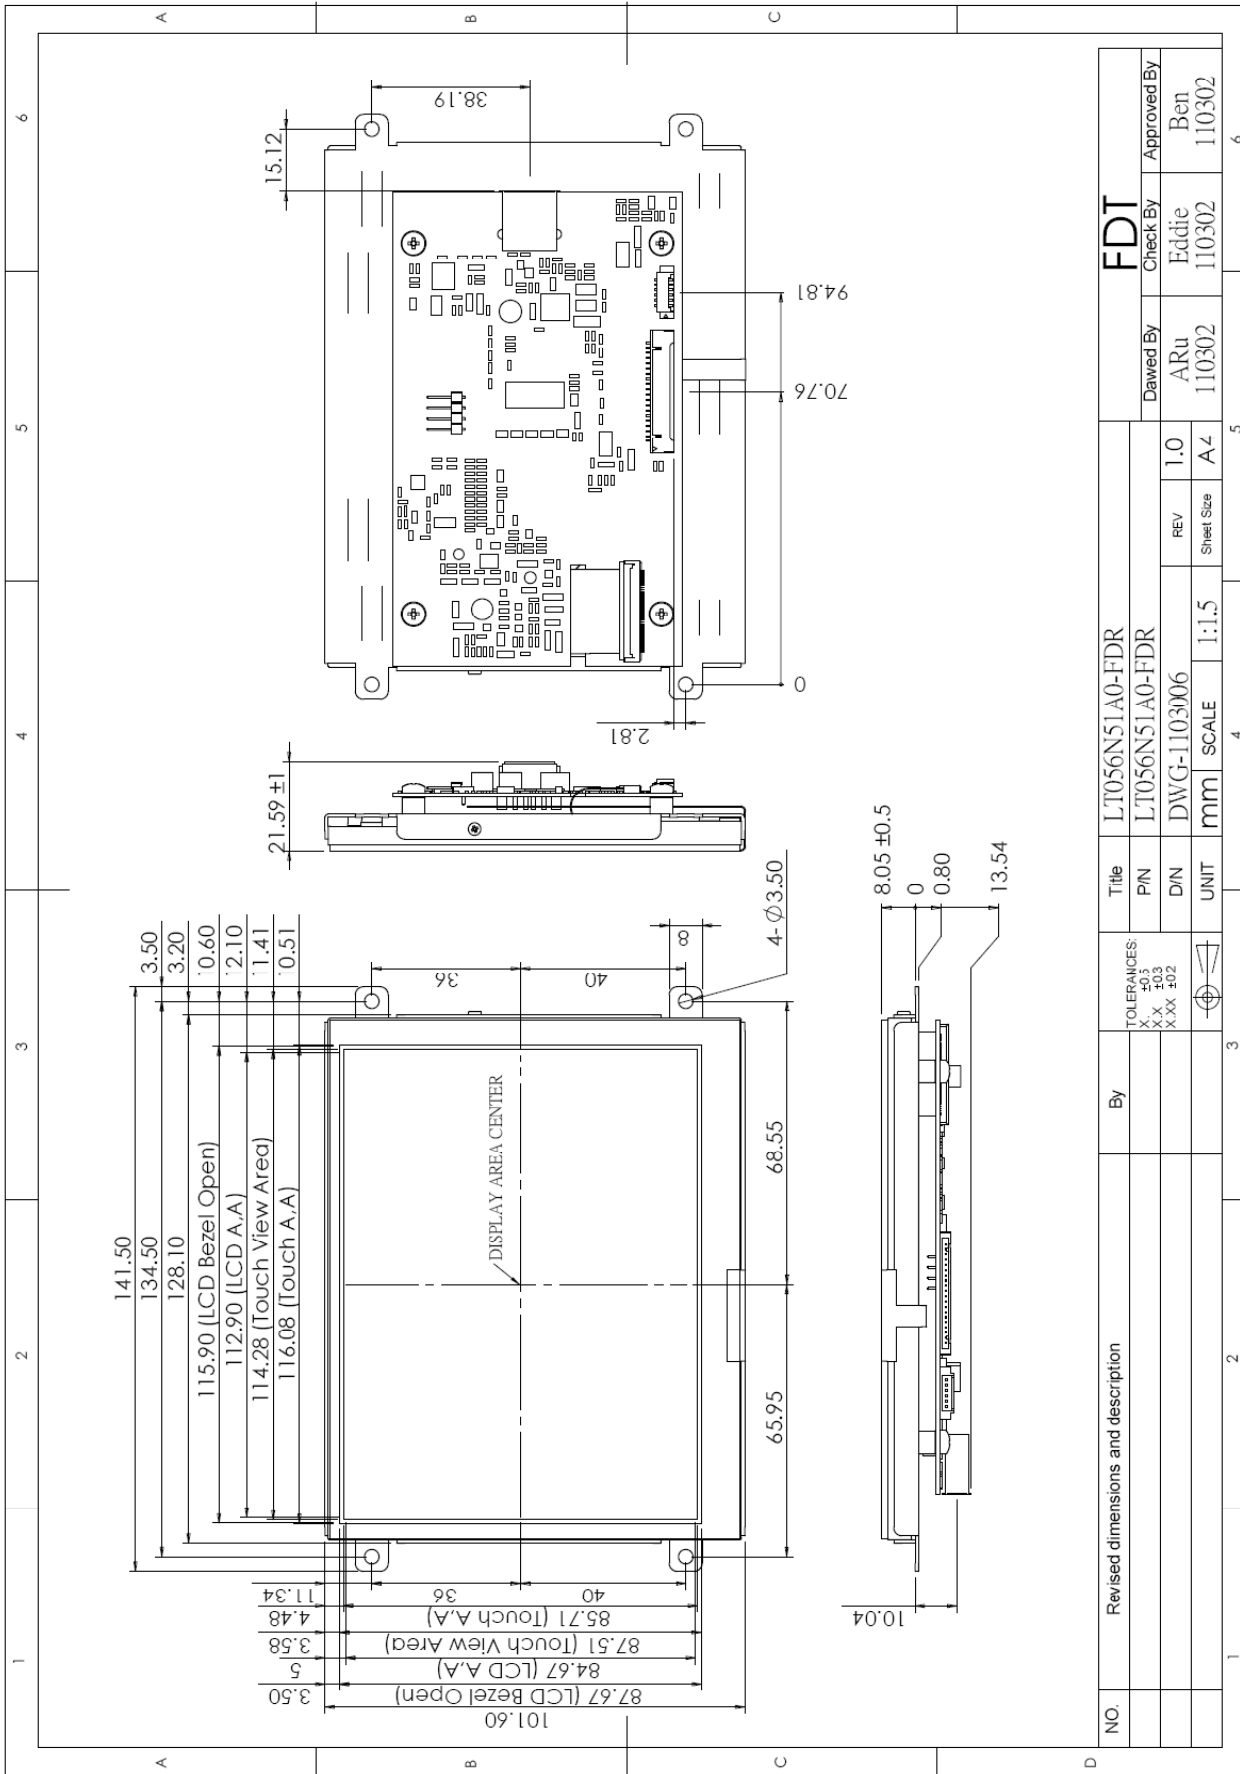


NO.	Revised dimensions and description	By	Title	L1056N51A0-FDR		FDT				
	TOLERANCES: X ±0.5 X.X ±0.3 X.XX ±0.2		PN	L1056N51A0-FDR	Drawn By	ARu	Check By	Eddie	Approved By	Ben
			DIN	DWG-1103006	REV	1.0	Sheet Size	A4	110302	110302
			UNIT	mm	SCALE	1:1.5				

FLAT DISPLAY TECHNOLOGY

LT056N51A0-FDR V0.0 

6.3 Unit (LT056N52A0-FDR)

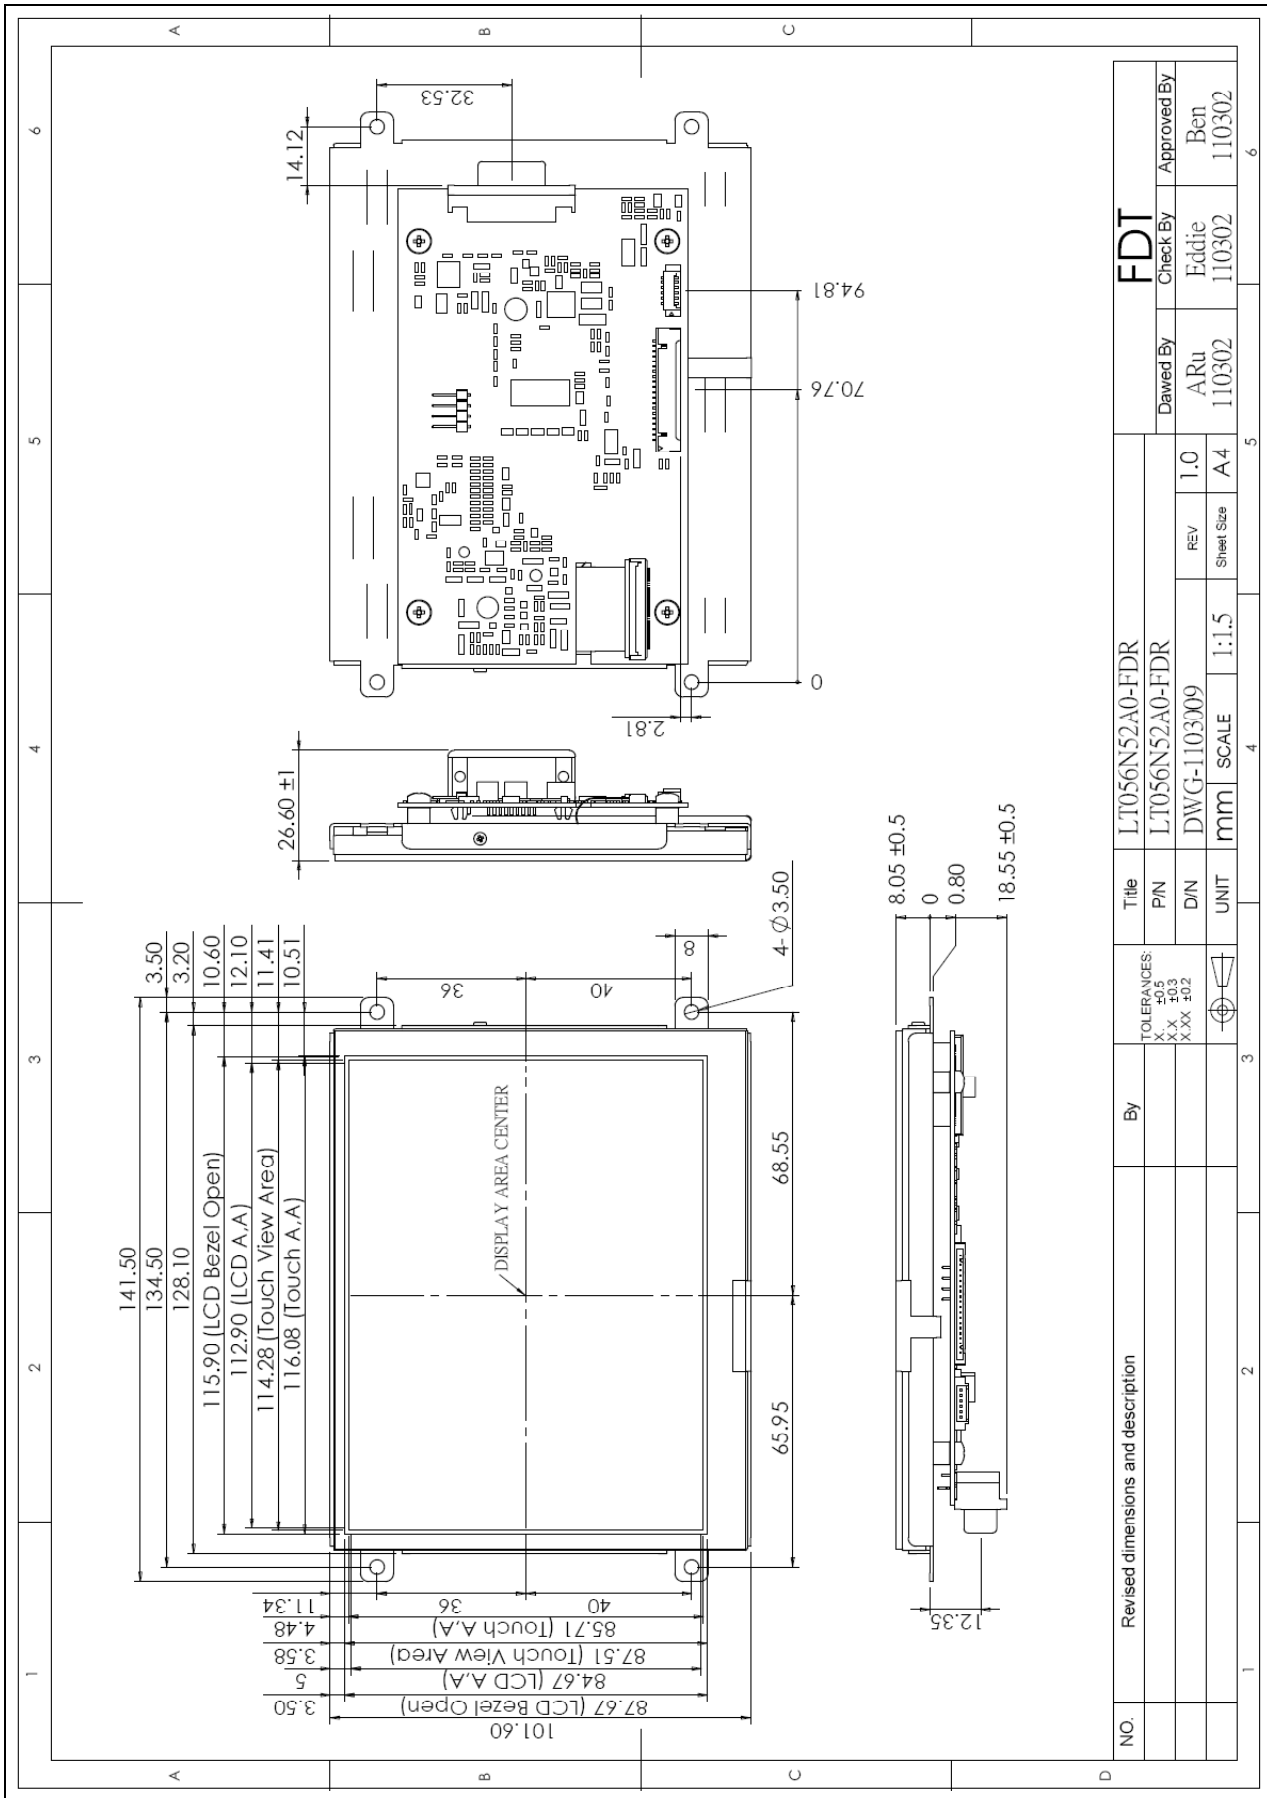

FLAT DISPLAY TECHNOLOGY

LT056N52A0-FDR V0.0



7. Pin Description

7.1 J204 : LVDS I/O Terminals (Pitch 1.25mm 20Pin, Side Entry Type)

※ Connector Part No.: FI-SEB20P-HF13E (JAE) or MS240420G (STM) ; Matching Connector Part No.: FI-S20S (JAE) or P240420 (STM)

Pin No	Symbol	I/O	Description	Remark
1	VCC	I	Power Supply (3.3 V)	
2	VCC	I	Power Supply (3.3 V)	
3	GND	P	Ground	
4	GND	P	Ground	
5	RX0-	I	Differential Data Input, CH0 (Negative)	R0 ~ R5, G0
6	RX0+	I	Differential Data Input, CH0 (Positive)	
7	GND	P	Ground	
8	RX1-	I	Differential Data Input, CH1 (Negative)	G1 ~ G5, B0, B1
9	RX1+	I	Differential Data Input , CH1 (Positive)	
10	GND	P	Ground	
11	RX2-	I	Differential Data Input , CH2 (Negative)	B2 ~ B5, DE, Hsync, Vsync
12	RX2+	I	Differential Data Input , CH2 (Positive)	
13	GND	P	Ground	
14	CLK-	I	Differential Clock Input (Negative)	LVDS Level Clock
15	CLK+	I	Differential Clock Input (Positive)	
16	GND	P	Ground	
17	L/R	I	Horizontal Display Mode Select Signal	Note
18	U/D	I	Vertical Display Mode Select Signal	Note
19	GND	P	Ground	
20	GND	P	Ground	

Note: The definitions U/D & R/L

L/R=High , U/D=High




L/R=Low , U/D=High



L/R=High , U/D=Low



L/R=Low , U/D=Low




FLAT DISPLAY TECHNOLOGY

■ LT056N5xA0-FDR V0.0



LVDS Interface Block Diagram

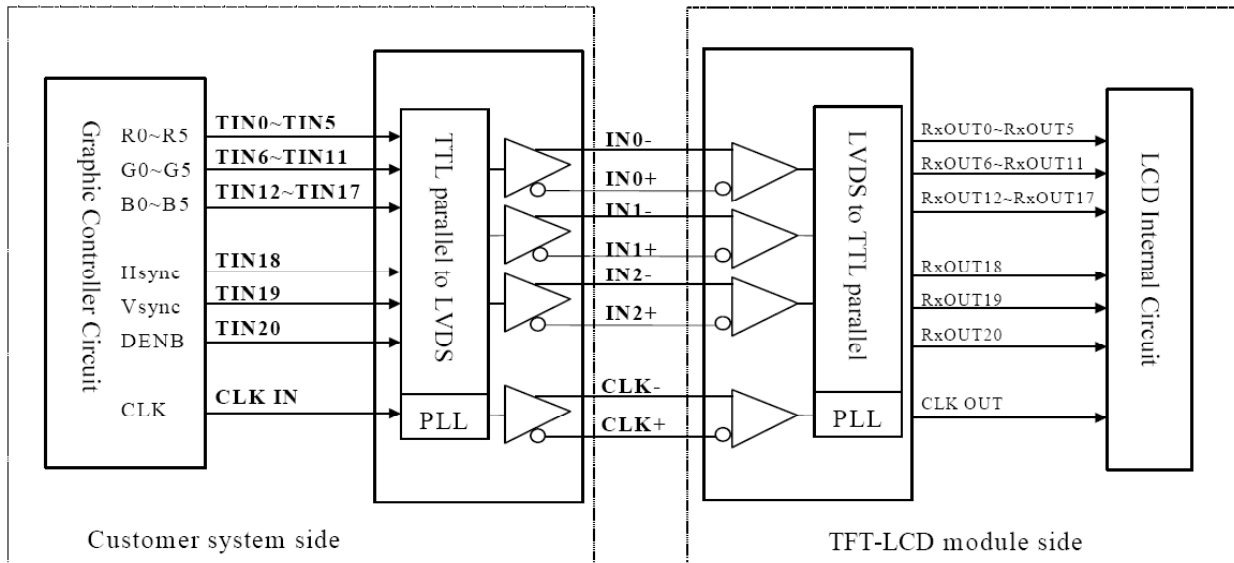


7.2 J203: Pin Assignment of Inverter (Pitch 1.25mm 6Pin, Side Entry Type)

※ Connector Part No.: 53261-0619 (MOLEX) or MS24016R (STM); Matching Connector Part No.: 51021-0600 (MOLEX) or P24016 (STM)

Pin No	Symbol	I/O	Description	Remark
1	VLED	-	Power Voltage For LED Backlight Circuit (+5V)	
2	VLED	-	Power Voltage For LED Backlight Circuit (+5V)	
3	ADJ	I	Adjust the LED brightness with PWM Pulse	Note1,2
4	NC	-	No Connection	
5	GND	-	Power Ground	
6	GND	-	Power Ground	

Note1: Pin.3 is used to adjust brightness.

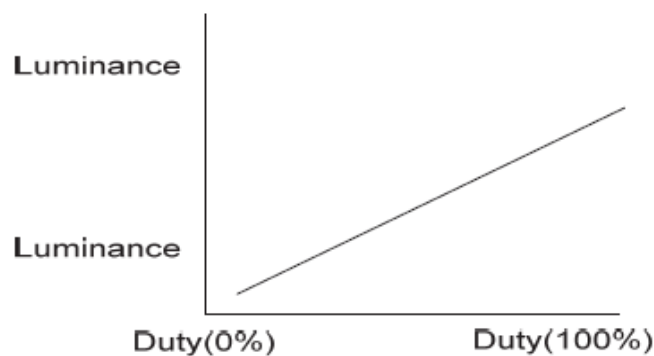


FLAT DISPLAY TECHNOLOGY

■ LT056N5xA0-FDR V0.0



Note 2:ADJ signal=0~3.3V,operation frequency:100~300Hz

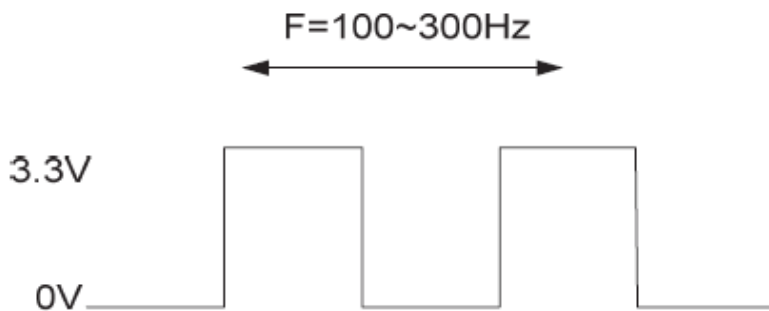

7.3 J301C : Pin Assignment of Touch USB (USBA-Female 2.0mm, Side Entry Type)(Option)

Pin No	Symbol	I/O	Description	Remark
1	DGND	-	Digital Ground	
2	D+	-	DATA (+)	
3	D-	-	DATA (-)	
4	VBUS	-	USB VCC	

7.4 J301D : Pin Assignment of Touch RS232 (D-SUB 9 MALE)(Option)

Pin No	Symbol	I/O	Description	Remark
1	NC	-	No Connection	
2	RXD	-	Receive Data	
3	TXD	-	Transmit Data	
4	NC	-	No Connection	
5	GND	-	Ground	
6	NC	-	No Connection	
7	NC	-	No Connection	
8	NC	-	No Connection	
9	NC	-	No Connection	



8. Absolute Maximum Ratings

8.1 Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit	Remark
Input Voltage	Vcc	+3	+3.6	V	
LED Driver Input Voltage	VLED	+4.5	+5.8	V	
Digital Input Signal	TTL	Vcc-0.5	Vcc+0.5	V	
Operating Temperature		-20	+70	°C	
Storage Temperature		-30	+80	°C	
Operating Temperature With TSP		-20	+70	°C	
Storage Temperature With TSP		-30	+80	°C	

9. Recommended Operating Conditions

9.1 Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Note	Remark
Input Voltage	Vcc	+3.1	+3.3	+3.5	V		
Total Current	Icc	-	-	-	mA		@+3.3V
LED Driver Input Voltage	VLED	+4.8	+5	+5.5	V		
LED Driver Current	ILED	-	-	-	mA		@+5V
LED Driver Power Consumption		-	-	-	W		@+5V
Digital Input Signal	TTL	Vcc-0.3	Vcc	Vcc+0.3	V		
Dimmer Adjust	Dimmer	Duty 0%	-	Duty 100%			Positive

10. Interface Timing

10.1 Timing Parameters

Parameter	Symbol	Min	Typ	Max	Unit	Remark
PXLCLK clock time	Tclk	33.3	39.7	-	ns	
PXLCLK pulse duty	Tcwh	40	50	60	%	Tclk
DATA set-up time	Tdsu	12	-	-	ns	DATA to PXLCLK
DATA hold time	Tdhd	12	-	-	ns	DATA to PXLCLK
DE setup time	Tesu	12	-	-	ns	DE to PXLCLK
VSYNC setup time	Tvst	12	-	-	ns	
VSYNC hold time	Tvhd	12	-	-	ns	
HSYNC setup time	Thst	12	-	-	ns	
HSYNC hold time	Thhd	12	-	-	ns	
HSYNC period time	Th	22.91	31.76	-	us	
HSYNC width	Thwh	1	-	-	Tclk	
VSYNC width	Tvwh	1	-	-	Th	
HSYNC to CLKIN	Thc	-	-	1	Tclk	

DE Mode	Min	Typ	Max	Unit	Remark
THC	48	160	765	tclk	
THD	640	640	640	tclk	
TH	688	800	1405	tclk	1TH=1line
TVC	6	45	255	line	
TVD	480	480	480	line	
TV	486	525	735	line	1TV=1field

HV Mode	Min	Typ	Max	Unit	Remark
Thwh	-	10	-	tclk	
Thbp	-	134	-	Tclk	
Thfp	-	16	-	tclk	
THD	-	640	-	tclk	
TH	-	800	-	tclk	1TH=1 line
Tvwh	-	2	-	line	
Tvbp	-	11	-	line	
Tvfp	-	32	-	line	
TVD	-	480	-	line	
TV	-	525	-	line	1TV=1 field

FLAT DISPLAY TECHNOLOGY

■ LT056N5xA0-FDR V0.0




11. 4W Resistance Touch Panel Characteristics

11.1 Touch Screen Integration Design Guide


Avoid the design that Front-case overlap and press on the active area of the touch-panel.

Give enough gap (over 0.5mm at compressed) between the front case and touch-panel to protect wrong operating.

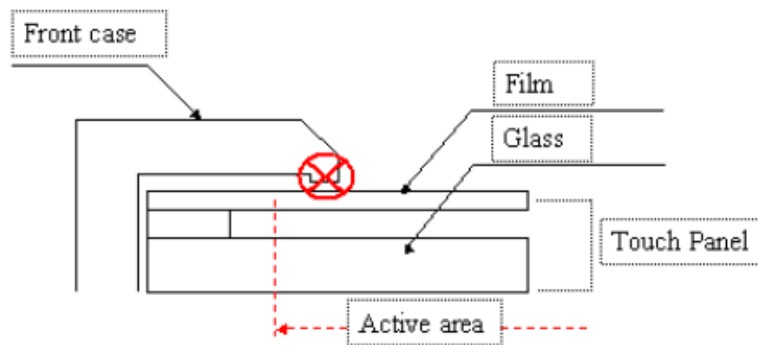

Use a buffer material (Gasket) between the touch-panel and front-case to protect damage and wrong operating.

Avoid the design that buffer material overlap and press on the inside of touch-panel viewing area.

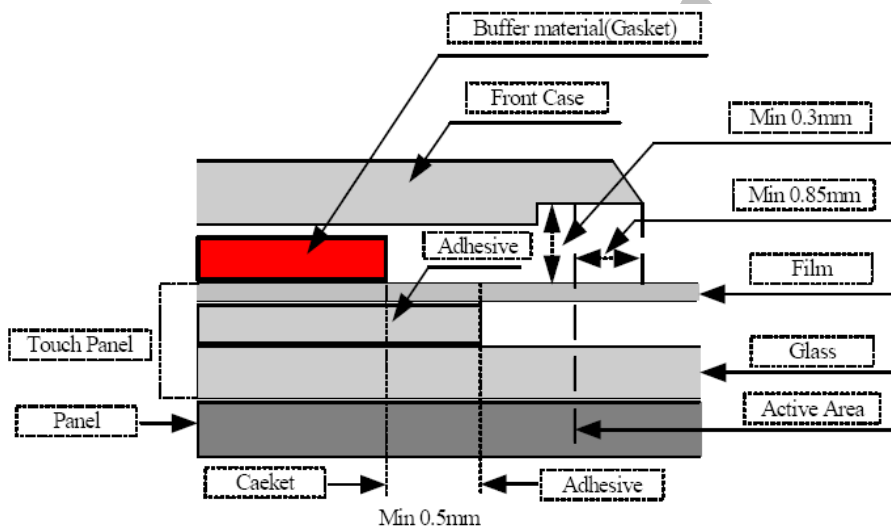

Note: We strongly suggest to follow above design guide to avoid the linear defect happened on the touch panel.

11.2 Electrical Performance

Parameter	Symbol	Min	Typ	Max	Unit	Remark
Terminal Resistance	X	330	-	1100	Ω	
	Y	100	-	900	Ω	
Input Voltage	VT	-	-	7.0	V	
Linearity		-	-	1.5	%	
Insulation Impedance		25	-	-	M Ω	DC 25V

FLAT DISPLAY TECHNOLOGY

■ LT056N5xA0-FDR V0.0



11.3 Optical Performance

Parameter	Specifications
Transmittance	$\geq 80\%$ Typ.
Haze	5.0% Typ.

11.4 Mechanical Performance

Parameter	Specifications
Input Method	Finger or stylus pen
Operating Force	Max: 80gf
Surface Hardness	3H or more

11.5 Durability Performance

Parameter	Specifications
Pen Sliding Durability	≥ 100000 words, with R0.8 mm polyacetal stylus, 250g, 60 mm / sec
Finger knocking Durability	≥ 10000000 times, with R8.0 mm silicon rubber, 200g, 5Hz

11.6 Environmental

Parameter	Specifications
Operating Temp.	-20°C ~ 70°C (Except dew condensation)
Storage Temp.	-30°C ~ 80°C (Except dew condensation)
Operating Humidity (Non Condensing)	20% RH ~ 90%RH
Storage Humidity (Non Condensing)	10% RH ~ 90%RH

11.7 Reliability Test Procedure

Parameter	Specifications
High temperature storage test	70°C for 240 hours.
Low temperature storage test	-30°C for 240 hours.
Thermal Cycling	-30°C (0.5 hr each) ~ 80°C (0.5 hr each) for 100 cycles.
High temperature and high humidity	40°C, 90%RH for 240 hours.


FLAT DISPLAY TECHNOLOGY

■ LT056N5xA0-FDR V0.0



12. Operation Manual

12.1 Driver Board Manual

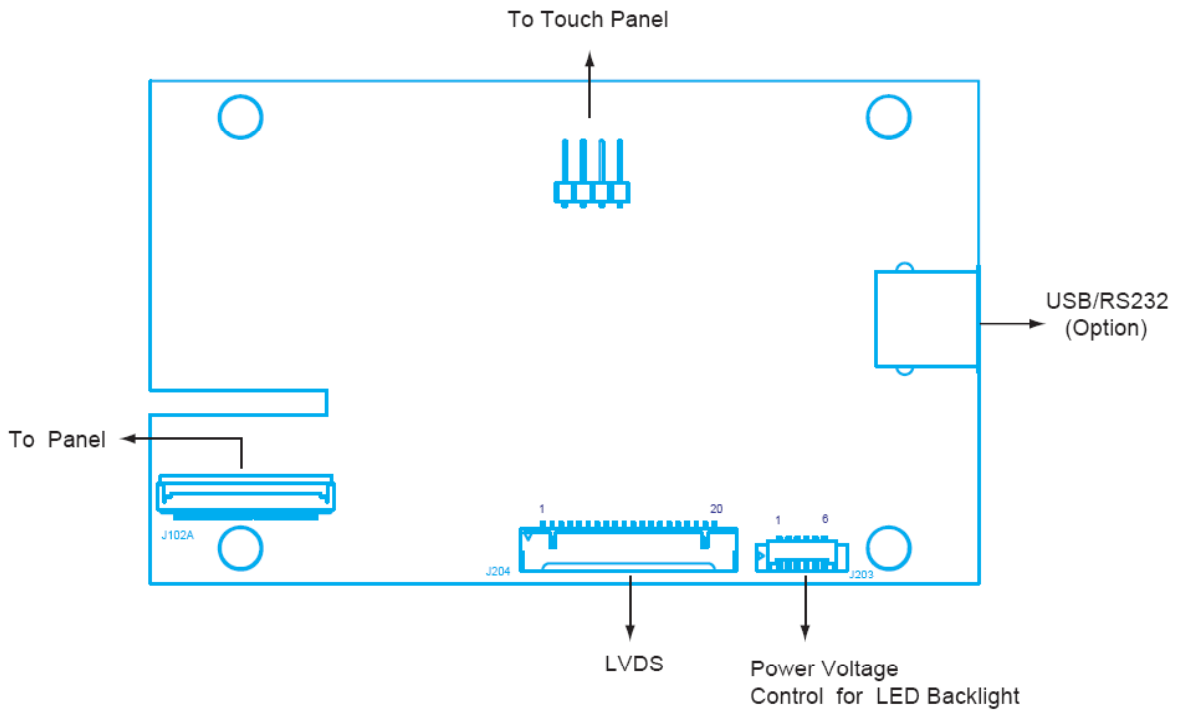

FDT

